
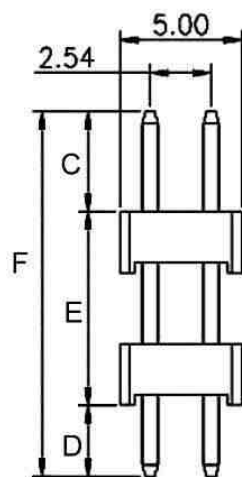


MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass


SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

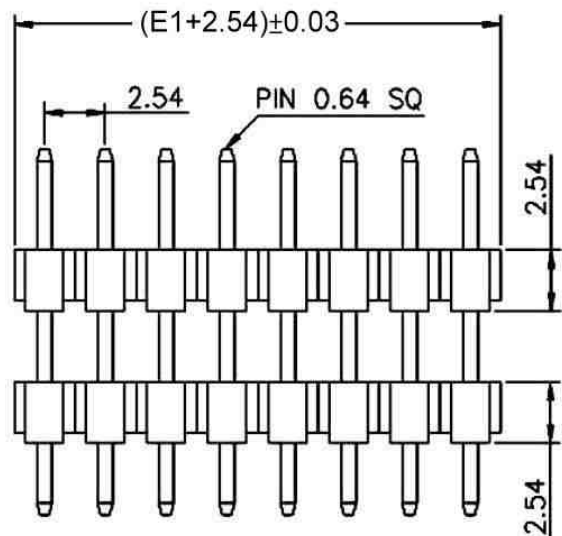

C=3mm D=6.4mm E=10.4mm F=19.8mm

POLES	DIM E1	POLES	DIM E1
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

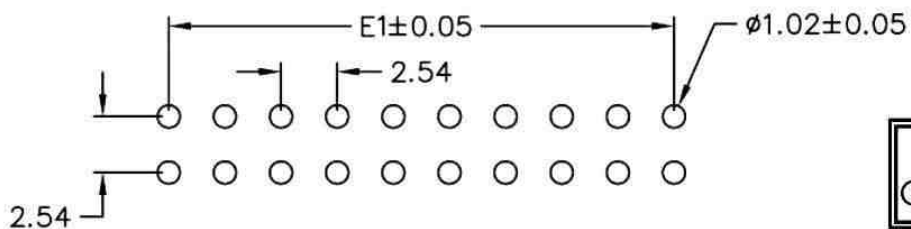


Recommended P.C.B Layout

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 HELEN



TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖 ABBY

SCALE
比例 參考

UNIT
單位 MM

2.54mm PIN HEADER DUAL ROW
DUAL INSULATOR 2XXXP
STRAIGHT TYPE FULL GOLD PLATING
(C=3mm D=6.4mm E=10.4mm F=19.8mm) ROHS

DATE 制表日

PAGE
張數 1 OF 1

REV.
版本 A

PART NO.

2013/12/03

料號 C2200-XXFSGMB0R